Générateurs électriques de vapeur
Electric Steam Generators



FR

Caractéristiques

Les générateurs électriques de vapeur Hisarmak convertissent directement l'électricité en chaleur pour produire de la vapeur. Ces systèmes sont efficaces sur le plan énergétique.

La gamme couvre des débits de vapeur de 500 à 3 000 kg/h. La pression de service peut être adaptée de 1 à 8 bar selon les besoins de l'installation. Ces systèmes répondent aux objectifs de production durable des sites industriels.

La production de vapeur électrique ne génère pas de fumées ni d'émissions directes sur site. La commande intégrée de l'alimentation en eau et en électricité assure une production fiable, silencieuse et propre.


EN


Features

The electric steam generators developed by Hisarmak are eco-friendly and high-efficiency systems that directly convert electrical energy into steam power.

With a steam production capacity ranging from 500 kg/h to 3,000 kg/h, our systems can be designed to operate at various pressure levels between 1 and 8 bar to meet user requirements. These systems offer a powerful solution for modern industrial facilities aiming for sustainable production goals.

Since they produce no waste gases, they contribute to environmental sustainability with zero emissions. Thanks to the integrated control system that efficiently manages water and electricity conversion into steam, the steam needs of facilities are met in a reliable, silent, and clean manner.

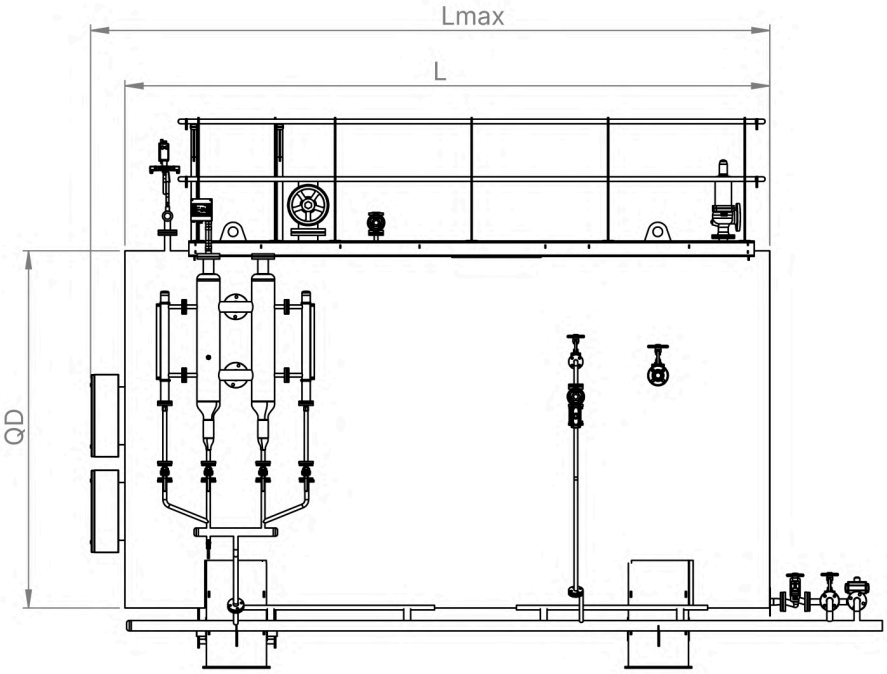

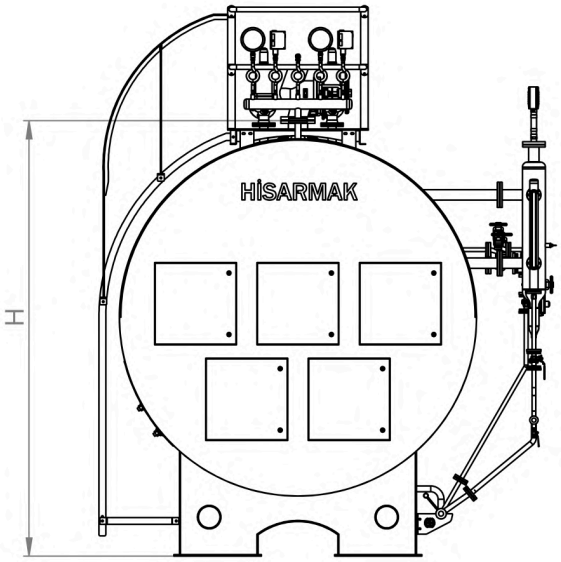

CARACTÉRISTIQUES DU GÉNÉRATEUR ÉLECTRIQUE DE VAPEUR ELECTRIC STEAM GENERATOR TECHNICAL INFORMATION							
Type Type	Débit de vapeur Steam Capacity	Puissance Capacity	Pression de service Working Pressure	Dimensions Dimension mm.			Masse Weight
	Kg/h	Kw	Bar	D	L	H	Kg.
HEBJ 1000	**1000**	**697**	**8**				
HEBJ 1500	**1500**	**1046**	**8**				
HEBJ 2000	**2000**	**1395**	**8**				
HEBJ 2500	**2500**	**1744**	**8**				
HEBJ 3000	**3000**	**2093**	**8**				